

Features

Low Harmonic Content

Provides clean power for both farm and home.

Compact Design

Easily maneuver and store your PTO generator.

Cast Iron Gearcase with Helical Gears

A 515 RPM operating speed makes for effective operation.

Voltmeter

A large 3" voltmeter ensures the proper output.

Premium Square D Circuit Breakers

Square D is the industry leader in circuit breaker protection.

Protective PTO Shield

Safety is always a priority.

60 Amp NEMA 14-60 Full Power Plug Included


You supply the #8/4 conductor cord, we provide the plug.

100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

POWER TAKE-OFF

10,000 Continuous Watts

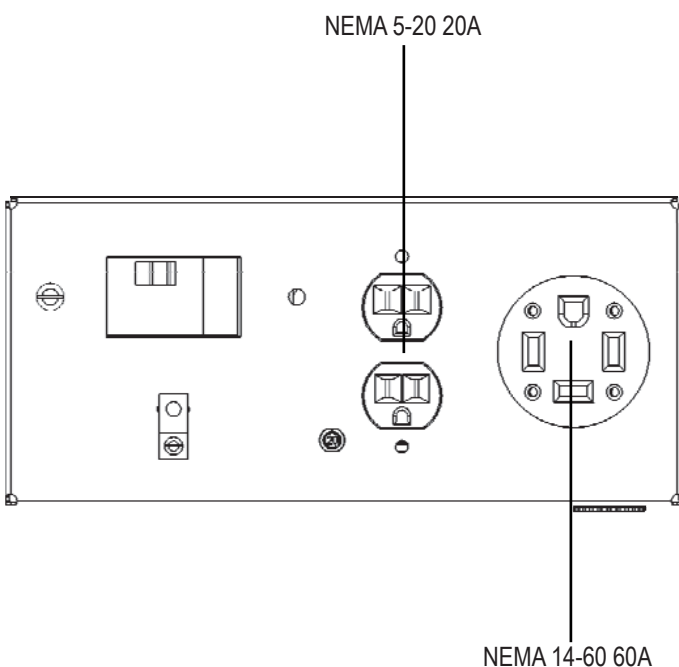

Optional Accessories

PTO Drive Shaft

1 3/8"- 6 spline x 1 3/8"-6 spline quick connect shaft. Designed to handle the horsepower ratings required.

Off-Road PTO Trailer

Our steel trailers are specifically designed to handle the torque of running a PTO generator.

Three-Point Hitch Kit

Category 1 three-point hitch kits are easy to install and include a PTO shaft.

Manual Transfer Switch

Set up your generator quickly and safely to restore power to critical circuit breakers.

W10PTOS

| | |
|----------------------------------|-------------------|
| CONTINUOUS WATTS | 10,000 |
| AMPS ⁽¹⁾ | 42 |
| OUTPUT | 120/240 V |
| PHASE | SINGLE |
| PTO INPUT SPEED | 515 RPM |
| INPUT SHAFT SIZE | 1 3/8" - 6 SPLINE |
| REQUIRED INPUT HP ⁽²⁾ | 20 |
| MOTOR STARTING ⁽³⁾ | 3 HP |
| VOLTMETER | YES |
| MAIN CIRCUIT BREAKER | 40 AMP |
| NEUTRAL BONDED | YES |
| GROUND LUG | YES |
| GEARCASE OIL | SAE 85W 90-140 |
| GEARCASE OIL CAPACITY | 1 PINT |
| LIFTING EYE | NO |
| WARRANTY | 1 YR |

NOTES: (1) Unity (1.0) power factor (2) Required HP at PTO of tractor for full rated output. Each 2 HP of tractor power equals approximately 1 kW of electric power. (3) Code G capacitor start motor. Please consult factory or authorized dealer for further information.

GENERATOR END


| | |
|---------------------------|------------------------|
| VOLTAGE REGULATION | +/- 5% |
| TOTAL HARMONIC DISTORTION | < 5% |
| RATING | 125° C |
| TYPE | 2 POLE REVOLVING FIELD |
| BRUSHLESS | YES |
| GENERATOR SPEED | 3600 RPM |
| VOLTAGE CONTROL | CAPACITOR |
| INSULATION | CLASS H |

RECEPTACLES

| | |
|--------------------------|--------------------------|
| 120 VOLT RECEPTACLES | (2) NEMA 5-20 20A DUPLEX |
| 120/240 VOLT RECEPTACLES | (1) NEMA 14-60 60A |

SHIPPING

| | |
|---------------------|-------------------------|
| DIMENSIONS (LxWxH) | 25.1" x 13.375" x 20.8" |
| NET WEIGHT | 156 LBS |
| SHIPPING DIMENSIONS | 37" x 16" x 24.5" |
| SHIP WEIGHT | 166 LBS |
| FREIGHT CLASS | 65 |

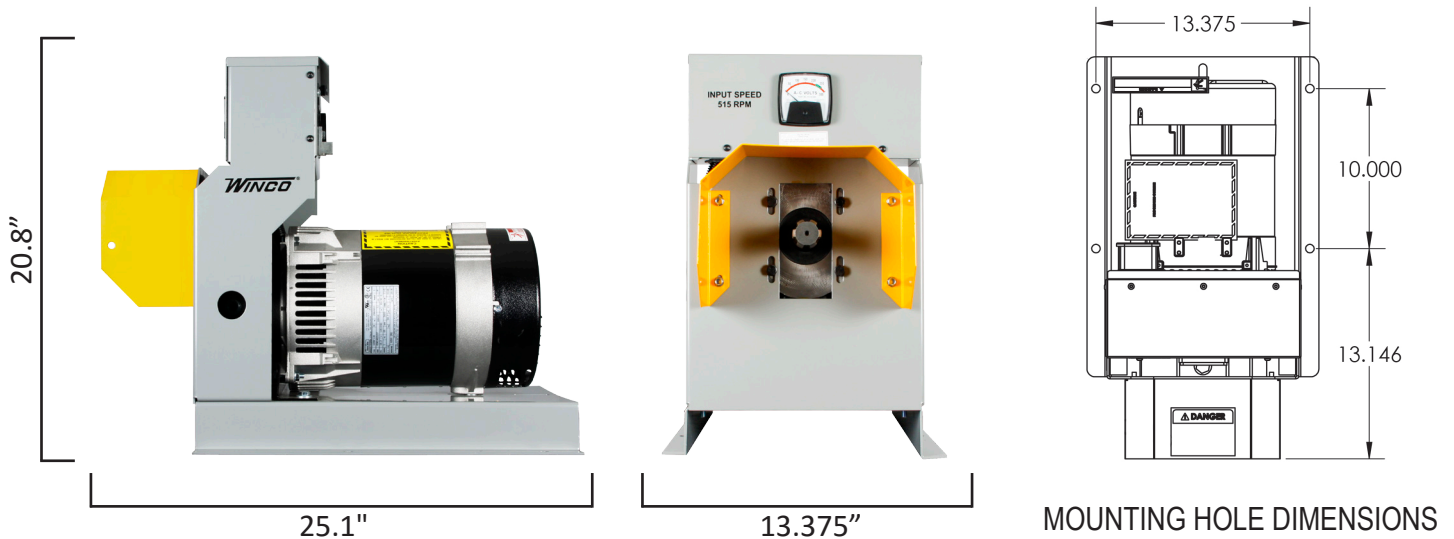

Specifications are subject to change without notice.
 225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com